


> PBE SERIES

三爪內撐式後拉中實動力夾頭

3 JAW INSIDE DRAW DOWN POWER CHUCK

- ◎ 內撐後拉式動力夾頭，適用於內徑夾持。
- ◎ 可同時將工件做徑向夾持與軸向後拉，使工件不上浮并緊貼定位基準面。
- ◎ 適用於高精度制程加工。
- ◎ 3 Jaw Expansible Pull Lock Power Chuck, It's suitable for internal gripping
- ◎ Radial clamping and axial pulling down at the same time, to keep the workpiece tightly close to the base surface of the chuck, to avoid workpiece from uplifting.
- ◎ It's suitable for high accuracy processing.

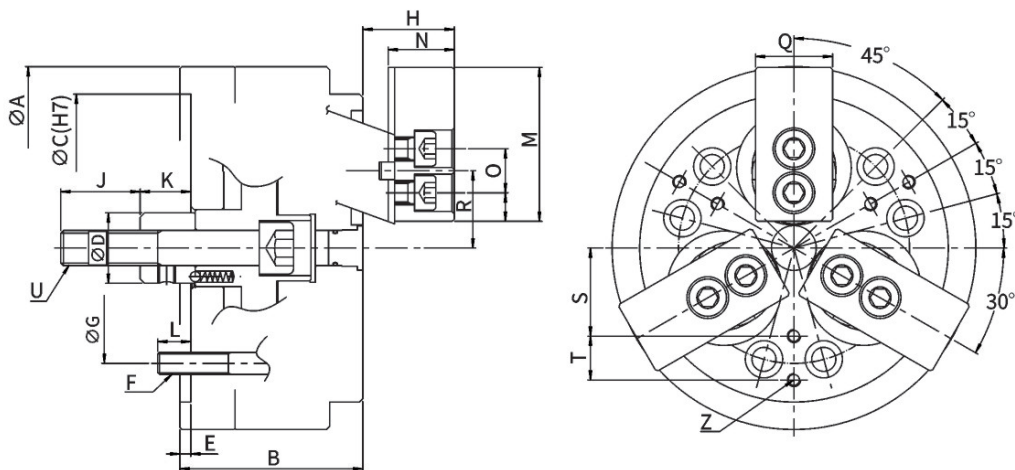

規格 Spec 型號 Model	楔心行程 Plunger stroke (mm)	爪行程直徑 Jaw stroke (Dia) (mm)	直徑夾持範圍 Clamping Range Dia. (mm)	容許油壓缸推力 Max.Pull forceKN KN (Kgf)	最大夾持力 Max. clamping force KN (Kgf)	最高轉速 Max RPM	重量 Weight (Kg)	適合油缸 Matching Cylinder	最大使用壓力 Max.pressureMpa (Kgf/cm2)
PBE-05	8	5.8	25-110	11.7(1193)	22.5(2295)	5000	8	S-100R	2.2(22)
PBE-06	8	5.8	40-140	14.7(1499)	24.5(2499)	5000	13	S-100R	3.4(33)
PBE-08	10	7.2	48-180	24.5(2499)	44.1(4498)	4500	26	S-125R	3.5(34)
PBE-10	15	10.8	65-220	34.3(3499)	58.8(5998)	4000	43.5	S-125R	3.1(30)
PBE-12	15	10.8	80-270	44.1(4498)	73.5(7497)	3500	68	S-150R	3.1(30)

規格 Spec 型號 Model	A	B	C(H7)	D	E	F	G	H	J	K
PBE-05	135	75	110	28	5	3-M10	82.6	28-36	26	14-22
PBE-06	165	80	140	32	5	6-M10	104.8	34-42	36	23-31
PBE-08	210	95	170	38	5	6-M10	133.4	45-55	36	25-35
PBE-10	254	110	220	50	5	6-M10	171.4	50-65	46	32-47
PBE-12	304	125	220	50	5	6-M10	171.4	55-70	46	32-47

規格 Spec 型號 Model	L	M	N	O	P	Q	R	S	T	U	Z
PBE-05	15	56	24.5		20	30	24.6-27.5	25		M12*1.75	3-M6
PBE-06	15	70	30	20	13	35	35-37.9	40	20	M16*2	6-M6
PBE-08	15	84	41	26	18	40	43-46.6	50	25	M20*2.5	6-M8
PBE-10	22	100	46	32	22	50	28-36	50	30	M24*3	6-M8
PBE-12	22	120	51	36	24	60	28-36	70	40	M24*3	6-M10

* 保留技術更改的權利，恕不另行通知 Subject to technology changes without prior information
 * 非標需求可訂做 Non-standard requirements can be made