




> VP SERIES

中實立式夾頭

NON-THRU-HOLE STATIONARY 2/3-JAW POWER CHUCK

- ◎ 立置式中實動力夾頭，適合鑽床、銑床或切削中心機使用，有二爪及三爪兩種形式。
- ◎ VP-200型式所配對之夾頭規格及寸法與TL型式相同。
- ◎ VP-300型式所配對之夾頭規格及寸法與T型式相同。
- ◎ It's STATIONARY CHUCKS with two or three jaws for drilling, milling and other machines.
- ◎ Specification and size of matching chuck for model VP-200 is the same as model TL.
- ◎ Specification and size of matching chuck for model VP-300 is the same as model T.

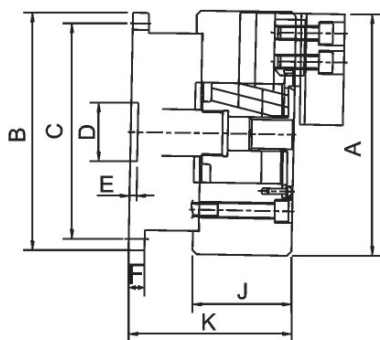

規格 Spec 型號 Model		活塞面積 Eff.piston area cm ²		爪行程 (直徑) (mm) Jaw stroke	最高使用壓力 Mpa(kgf/cm ²)	重量(kg) Weight
		押側 Extend	拉側 Retract			
VP-	204	28.0	24.9	6.4	2.1(21)	7.1
	304				3.1(31.5)	7.9
VP-	205				2.3(23.3)	10.2
	305				3.5(35)	10.6
VP-	206	63.1	53.5	8.5	2.4(24)	18.3
	306				3.6(36)	19.3
VP-	208	103.4	90.8	8.8	2.0 (20)	31.6
	308				3.0(30)	33.6
VP-	210	153.1	133.5		1.6(16)	52.8
	310				2.3(23)	54.5
VP-	212	177	153	10.6	2.0(20)	117
	312				2.8(28)	119
VP-	215	292	275	16	2.6(26)	160
	315				3.1(31)	165

規格 Spec 型號 Model	A	B	C	D H7	E	F	G	H	J	K	L	M
VP- 204	110	146	130	30	4.5	12	23	26	52	92	9	PT1/4
VP- 304							23		55	95		
VP- 205	135	178	160	40	5	14	25	30	74	125	11	PT3/8
VP- 305							23		85	140		
VP- 206	165	205	186	50	10	17	29	37	89	176	13	PT3/8
VP- 306							25		106	206		
VP- 208	210	248	225	110	10	23	32	40	114	228	22	PT3/8
VP- 308							29		119	228		
VP- 210	254	375	340	130	10	25	37	40	119	228	22	PT3/8
VP- 310							32		119	228		
VP- 212	304	400	376	130	10	25	37	40	119	228	22	PT3/8
VP- 312							37		119	228		
VP- 215	381	400	376	130	10	25	40	40	119	228	22	PT3/8
VP- 315							40		119	228		

* 保留技術更改的權利，恕不另行通知 Subject to technology changes without prior information
 * 非標需求可訂做 Non-standard requirements can be made